


## MONTAGGIO BRACCETTI “MAL2P TRX / TRX V / TRX G / TRX VG” “MAL2P TRX / TRX V / TRX G / TRX VG” ARMS MOUNTING

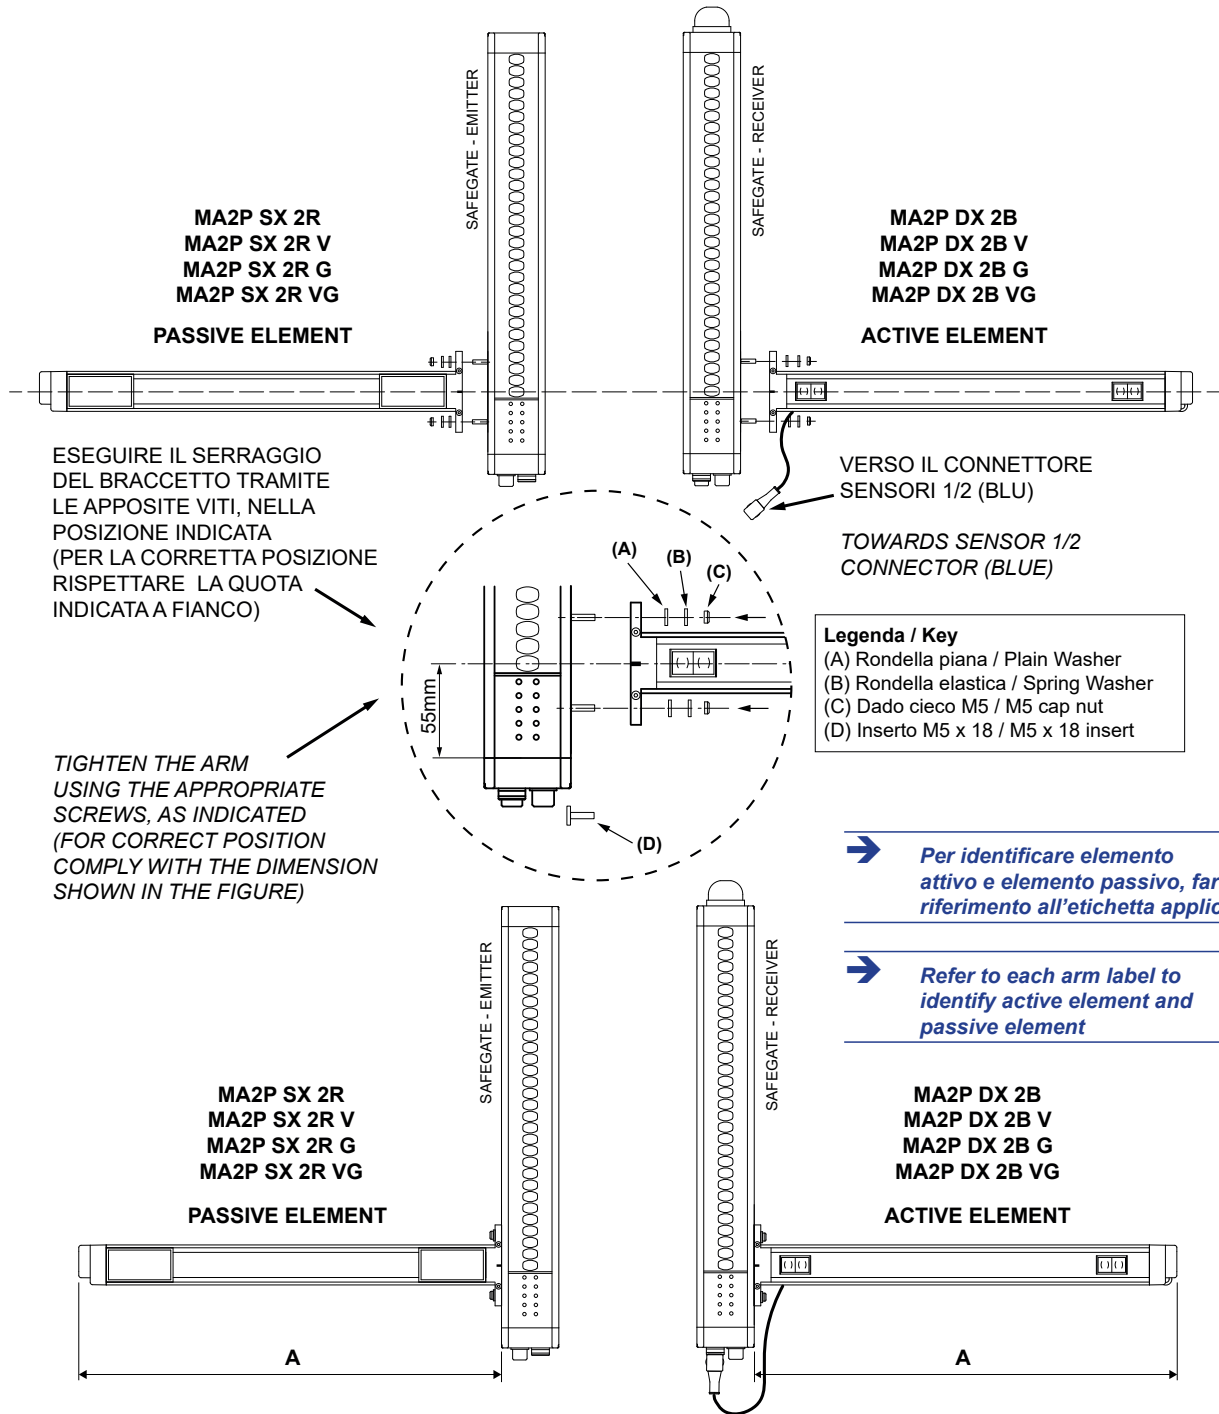

### CARATTERISTICHE TECNICHE - TECHNICAL FEATURES

<b>Portata utile / Working range</b>	m	0...3,5 (MAL4P TRX, MAL4P TRX V) / 0...2 (MAL4P TRX G, MAL4P TRX VG)
<b>Uscite / Outputs</b>		PNP - 100mA - @ 24VDC
<b>Consumo max / Power consumption</b>	W	2 (Elemento Attivo / Active Element)
<b>Sensori optoelettronici integrati / Opto-electronic integrated sensors</b>		2 sensori paralleli attivi, con elemento passivo 2 parallel active sensors, with passive element
<b>Temperatura di funzionamento / Working temperature</b>	°C	-30...55
<b>Grado di protezione / IP rating</b>		IP 65, IP 67
<b>Lunghezza / Length (A)</b>	mm	370 (MAL4P TRX, MAL4P TRX G) - 440 (MAL4P TRX V, MAL4P TRX VG)
<b>Sezione / Section</b>	mm	35 X 45