

Product Data


Electrical Data	
Supply Voltage	10-30 V dc
Voltage ripple	+/- 15%
Reverse polarity protected	Yes
Short circuit protected	Yes
Current consumption	20 mA
Max. output load	120 mA / 30 V dc

Environmental Data	
Temperature, operation	-20 to +60 °C
Sealing class	IP 67
Approvals	UK CA CE

Available Models					
	Model	Supply Voltage	Output	Output Mode	Sensing Range
Diffuse Proximity	SMP 7600	10-30 V dc	NPN/PNP	Light/dark	50 cm, adjustable*


* Note: Measured against matt white A4 paper.

Illustration

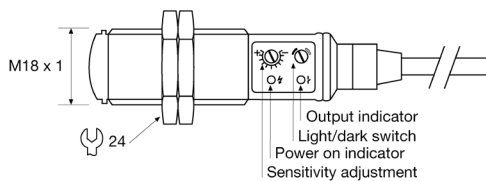

Connection

Wiring Diagrams

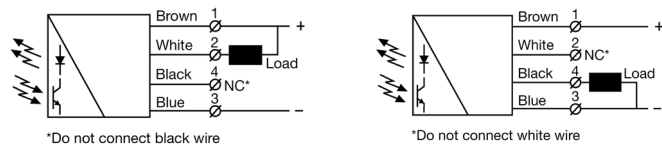

SMP 7600 Load as NPN	SMP 7600 Load as PNP
-------------------------	-------------------------

Connection Wires/Pins	Cable	4 pin, M8 plug	4 pin, M12 plug
Supply +	Brown	Pin 1	Pin 1
Supply -	Blue	Pin 3	Pin 3
Output	White	Pin 2	Pin 2
Output	Black	Pin 4	Pin 4

-	 Sensor plug	 Sensor plug
---	-----------------	-----------------

Mounting & Installation

Mounting & Installation	
1	Position the sensor pointing at the target object.
2	Align by moving sensor horizontally and vertically until the output changes when the target object is present (refer to Output Logic table).
3	Fasten the sensor securely using the enclosed locking nuts and/or a mounting bracket. Avoid acute angles on cable close to sensor.

Adjustments

Output Mode Selection		
The output mode can be selected via an integral light/dark switch. Refer to Output Logic table for output mode reference.		
Light Operated (N.O.)	Enables the output to be active when there is an object present.	Turn switch to full clockwise position
Dark Operated (N.C.)	Enables the output to be inactive when there is an object present.	Turn switch to full counter clockwise position

Output Logic			
Detection	Output mode	Output status	Yellow LED
Object present	Dark operated (N.C.)	Open	Off
	Light operated (N.O.)	Closed	On
Object absent	Light operated (N.O.)	Open	Off
	Dark operated (N.C.)	Closed	On

Sensitivity Adjustment

Maximum sensitivity can be used for most applications and is advised for applications with contaminated environments. Increase the sensitivity to maximum by turning the potentiometer to full clockwise position.

Sensitivity adjustment may be required in applications where objects to be detected have highly reflective, dark or textured surfaces and/or applications where a background is present. Proceed with the following steps:

1	Start with the sensitivity at minimum by turning the potentiometer to full counter clockwise position.
2	Select target object with the smallest dimensions and least reflective surface.
3	Place target object in front of sensor.
4	Increase the sensitivity by turning the potentiometer clockwise until the target object is detected and the output status changes (Position 1). If the output has not changed, attempt to move sensor closer to target object and repeat procedure.
5	If there is a background proceed to step 7.1. If there is no background proceed to step 6.
6	Turn the potentiometer clockwise to a position midway between Position 1 and maximum clockwise position.
7.1	Remove target object. If the output changes, proceed to step 7.2. If the output has not changed, a background is detected. Proceed to step 7.4
7.2	Turn the potentiometer clockwise until the output status changed (Position 2). A background is now detected.
7.3	Turn the potentiometer counter clockwise to a position midway between Position 1 and Position 2.
7.4	If the background is still detected and the output has not changed, attempt to angle the sensor in relation to the plane of the background. Then repeat procedure from step 1.



Warning
 This device is not to be used for Personnel Protection in Machine Guarding Safety applications. This device does not include the self-checking redundant circuitry necessary to allow its use in personnel machine guarding stand-alone safety applications.